

IT FIT 75/220...240/550 CS D L

ICUTRONIC IT FIT D CS L (non-isolated) | Linear / Area Constant Current – Non dimmable



Product family features

- Output current: 200/250/300/350 mA
- Low THD <15% @ full load
- Output power: 5 W - 18.9 W
- Input voltage: 220 – 240 VAC
- Ambient temp range ta: -25 to +50 °C
- Wide output voltage range
- Low LF-ripple < 5%
- Very high efficiency up to 87%
- Fixed output (no dimming)
- 5 years guarantee*

Product family benefits

- Flexible with 1 driver offers 4 output currents
- High quality light with very low ripple
- Very high efficiency up to 87%
- Enable slim fixture design with flat 21 mm height metal housing
- Long lasting and high reliability
- Non-isolated driver

Areas of application

- Linear and area lighting
- Office, industrial and shop lighting



Technical data

Electrical data


Nominal input voltage	220...240 V
Mains frequency	50/60 Hz
Input voltage AC	198...264 V
Current set	DipSwitch
Power factor λ	≥ 0.98
ECG efficiency	up to 93 % ¹⁾
Device power loss	5.63 W ²⁾
Inrush current	30.9 A ³⁾
Max. ECG no. on circuit breaker 10 A (B)	11
Max. ECG no. on circuit breaker 10 A (C)	17
Max. ECG no. on circuit breaker 16 A (B)	17
Max. ECG no. on circuit breaker 16 A (C)	27
Max. ECG no. on circuit breaker 25 A (B)	-
Surge capability (L/N-Ground)	2 kV
Surge capability (L-N)	1 kV
Nominal output voltage	90...216 V
Nominal output current	350 / 400 / 500 / 550 mA ⁴⁾
Output ripple current (100 Hz)	< 5 %
Output PSTLM	≤ 1
Output SVM	≤ 0.4
Nominal output power	31.5...75 W

¹⁾ Full load, 220 – 240 V, 50 Hz


²⁾ At 230 V, Input power 22 W max.

³⁾ $t_{\text{width}} = 220 \mu\text{s}$ (measured at 50 % I_{peak})


⁴⁾ $\pm 7.5\%$

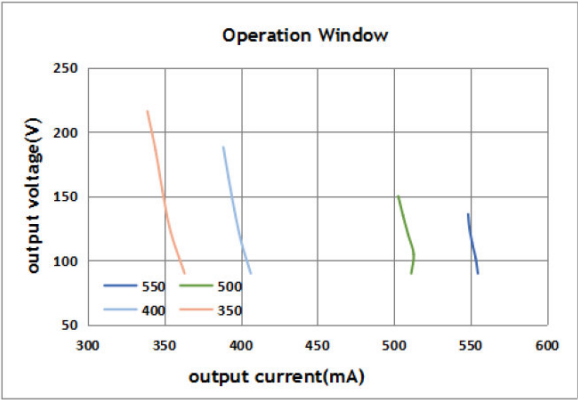


IT FIT 75 CS D L Operating Window

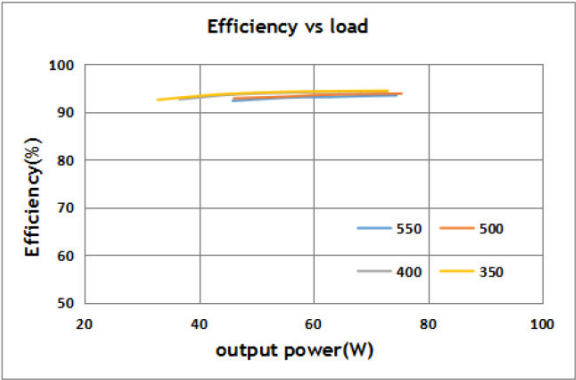

IT FIT 75 CS D L Typical Efficiency vs. Load

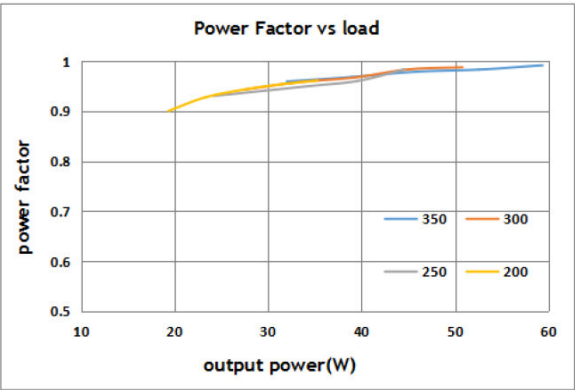

IT FIT 60 75 CS D L Typical Power Factor vs. Load

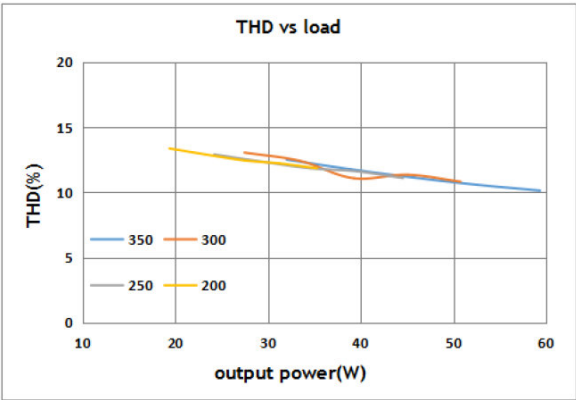

IT FIT 60 75 CS D L Typical THD Vs Load

Dimensions & weight



Mounting hole spacing, length	200.0 mm
Product weight	129.00 g
Cable cross-section, input side	0.5...1.5 / 0.75...1.5 mm ^{2 1)}
Cable cross-section, output side	0.5...1.5 / 0.75...1.5 mm ^{2 1)}
Wire preparation length, input side	8.5...9.5 mm
Length	210.0 mm
Width	30.0 mm
Height	21.0 mm

¹⁾ Solid/ Flexible Leads

Temperatures & operating conditions

Ambient temperature range	-25...+50 °C
Maximum temperature at tc test point	75 °C
Max.housing temperature in case of fault	110 °C
Temperature range at storage	-25...80 °C
Permitted rel. humidity during operation	5...85 % ¹⁾

¹⁾ Non-condensing

Lifespan

ECG lifetime	50000 / 100000 h ¹⁾
--------------	--------------------------------

¹⁾ T_c = 75°C, with max. 10% failure rate

Additional product data

Encapsulated	No
--------------	----

Capabilities

Dimmable	No
Overheating protection	Automatic reversible

Product datasheet

Overload protection	Automatic reversible
Short-circuit protection	Automatic reversible
No-load proof	Yes
Max. cable length to lamp/LED module	2.0 m
Suitable for fixtures with prot. class	I / II
Number of channels	1

Certificates & standards

Approval marks – approval	CE / ENEC 05 / EAC / CCC / BIS / RCM ¹⁾
Standards	Acc. to IEC 61347-1/Acc. to IEC 61347-2-13/Acc. to IEC 62384/Acc. to IEC 61000-3-2/Acc. to IEC 61000-3-3/Acc. to IEC 61547
Type of protection	IP20

¹⁾ In preparation

Logistical data

Commodity code	850440829000
----------------	--------------

Download Data

File
 User instruction ICUTRONIC LED Power Supply
 Certificates IT FIT CS L DEKRA 35 113195 030820
 Declarations of conformity IT FIT CS D L CE 4205375 090221
 Declarations of conformity IT FIT CS D L UK DoC 4281080 090221

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899617414	IT FIT 75/220...240/550 CS D L	Shipping carton box 20	237 mm x 162 mm x 130 mm	4.99 dm ³	2889.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.