

PL-CN35-COB- 600-927-24D-G2

PrevaLED COIN 35 COB G2 | LED modules with integrated optics and heat sink



Product family features

- Color consistency < 2 SDCM
- Type of protection: IP20
- High flux output up to 650 lm
- Beam angle: 15°, 24°, 36°

Product family benefits

- Compact form factor compatible with conventional MR11 lamps
- Precise optical control and free from multi-shadow issue



Areas of application

- Retail, shop, restaurant, hospitality
- High-end residential
- Suitable for indoor applications
- Connecting multiple modules in parallel on one LED driver is not permitted
- Connecting multiple modules in series on one LED driver is not recommended
- Do not use in sealed fixtures
- Avoid covering the lens with dust or any object

Technical data

Electrical data

Nominal voltage	32.60 V
Nominal current	0.18 A
Type of current	DC
On-mode power	6 W
Energy consumption in on-mode	6 kWh/1000h
Networked standby power	0

Photometrical data

Luminous efficacy	95 lm/W
Color Rendering Index	90
Correlated color temperature CCT	2700 K
Colour consistency (McAdam ellipses)	2
Useful luminous flux (Φ_{use})	480 lm


Light technical data

Beam angle	24.00 °
Starting time	< 0.5 s
Warm-up time (60 %)	< 2.00 s

LED module information

Number of LEDs per module	1
---------------------------	---

Dimensions & weight

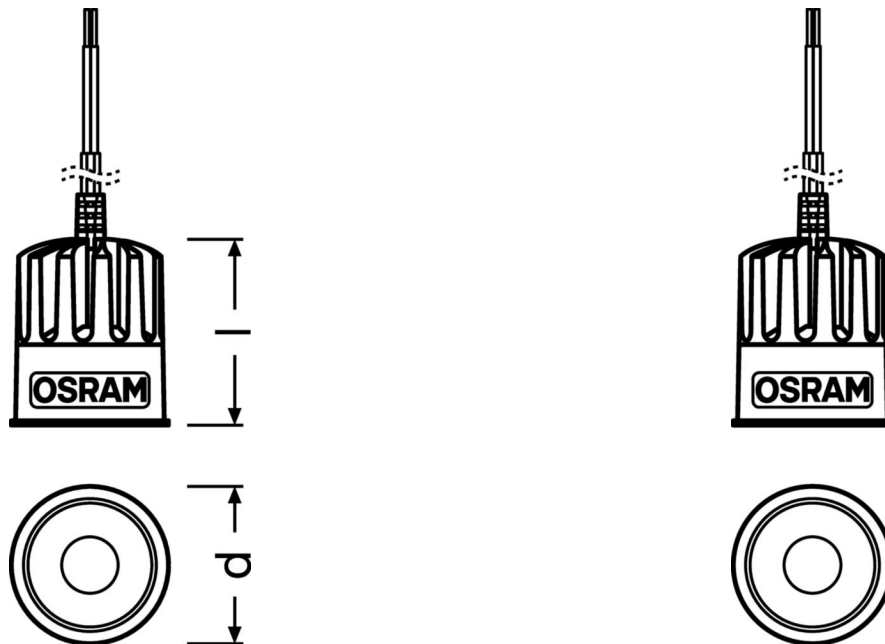

Product weight	38.00 g
Height EPREL	40 mm
Length EPREL	34 mm
Width EPREL	34 mm

Temperatures & operating conditions

Performance temp. acc. to IEC 62717	75 °C
Maximum temperature at tc test point	95 °C
Temperature range at storage	-40...80 °C
Ambient temperature range	-25...+40 °C

Lifespan

Number of switching cycles	> 15000
Lumen maintenance factor LMF	96
L70B50 lifetime	0 h

Additional product data

Product remark	<p>Modules perfectly matched to OSRAM OPTOTRONIC® LED drivers (see relevant table) / For current photometric data and important safety, installation and application information (see www.osram.com/led-systems). / All the technical parameters apply to the entire module.</p> <p>In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values / Tolerance for optical and electrical data: +/-10%</p>
Lighting technology used	4

Capabilities

Dimmable	Yes
----------	-----

Certificates & standards

Standards	Acc. to IEC 62471 / Acc. to EN 60598-1 / Acc. to EN 60529 / Acc. to EN 55015 / Acc. to EN 61547 / Acc. To EN62031 IEC 605981 / CE
Type of protection	IP20
Energy efficiency class	F

Logistical data

Commodity code	85395100000
----------------	-------------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	04-06-2024
Primary Article Identifier	4062172175692
Declaration No. in SCIP database	In work

Download Data

File		
IES data	Compressed	► PL CN35 COB 600 927 24D G2.1 IES 250321
Certificates	PDF	► PL CN35 COB G2 ENEC 181121
CAD data	Compressed	► PL CN35 COB G2 STEP 160321
CAD data	Compressed	► PL CN35 G2 STEP 041121
Mandatory Publications	PDF	► PL CN35 COB G2 CE 4264217 150623
Mandatory Publications	PDF	► PL CN35 COB G2 UK DoC 4312555 250521
User instruction	PDF	► UI PL CN35 50 111 COB G2

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172175692	PL-CN35-COB- 600-927-24D-G2	Shipping carton box 20 Pieces	218 x 176 x 87 mm	3.34 dm ³	1108.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

Accessories Optional

Product description	Accessory name	Accessory code
PL-CN35-COB- 600-927-24D-G2	36D LENS FOR COIN 35 COB G2	▶ 4062172235013
PL-CN35-COB- 600-927-24D-G2	BLACK COVER FOR COIN 35 COB G2	▶ 4062172251761
PL-CN35-COB- 600-927-24D-G2	PL-CN35 -ROUND-RING	▶ 4062172270113

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.